


WDM Coupler 850 nm / 1550 nm

Specifications

Type	850/1550	
Operating wavelength (nm)	850 and 1550	
Operating bandwidth (nm)	±15	
Insertion loss (dB) at 1550nm	≤0.4	
Insertion loss (dB) at 850nm	≤1.0	
Isolation (dB)	≥13	
PDL (dB)	≤0.15	
Directivity (dB)	≥50	
Operating temperature (°C)	-40 ~ +85	
Fiber	SMF-28e	
Configuration	1×2	
Pigtail type	250um bare fiber	900µm loose tube
Dimensions	Φ3.0×70	Φ3.0×70

The above specification is without connector

Package Dimensions

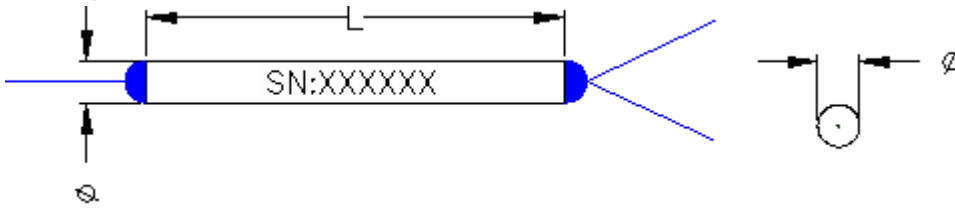

Ordering Information

WDMC	Port	Wavelength	Pigtail	Fiber	Length	Connector	Package
	1x2	850/1550	0=250um bare fiber 1=900um loose tube	1=SMF-28e 8=OFS980	1=1m S=Specify	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others	3x60