

## Isolator Polarization Beam Combiner/Splitter(IPBC/IPBS)


<b>Features</b>	
Low Insertion Loss High Extinction Ratio High Stability and Reliability	
<b>Application</b>	
Amplifier Fiber Sensor Coherent Telecommunication Systems Polarization Mode Dispersion Compensator	

### Specifications

Parameter		Values	
		Single Stage	Dual Stage
Isolator Stage		Single Stage	Dual Stage
Center Wavelength (nm)		1310,1480,1550	
Operating Wavelength Range (nm)		±20	
Typ. Insertion Loss (dB)		0.45	0.55
Insertion Loss (dB)		≤0.7	≤0.8
Typ. Isolation (dB)		35	51
Isolation @23°C (dB)		≥20	≥40
Extinction Ratio (dB) (Only for PBS)		≥20	≥20
Directivity (dB)		≥50	
Return Loss (dB)		≥50	
Power Handling (W)		500	
Fiber Type	Port 1 & 2	PM Panda Fiber	
	Port 3	SMF-28e or PM Panda Fiber	
Operating Temperature (°C)		-5 ~ +70	
Storage Temperature (°C)		-40 ~ +80	
Dimensions (mm)		φ5.5 × L35(P1)	

\*Above Specifications are for device without connectors, for devices with connectors. The PM fiber and the connector key are aligned to slow axis.

### Package Dimensions

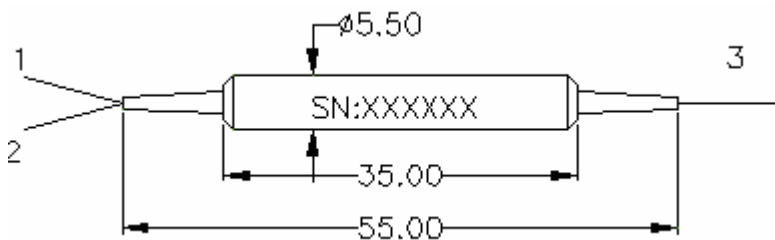

### Ordering Information

IPBS IPBC	Port	Wavelength	Stage	Pigtail Type	Fiber Type For Port 3	Length	Connector
	1x2	1310 1480 1550	S=Single Stage	250=250um bare fiber 900=900um loose tube	1=SMF-28e 3= PM fiber,Slow axis align to Port 1 4=PM fiber, Slow axis align 45° to port 1	0.8= 0.8m 1=1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC XX=Other