


Multimode Pump Laser Protector

Features	
Low Insertion Loss High Power High stability and reliability	
Application	
Fiber Laser	

Specifications

Parameter	Values
Pump laser Wavelength (nm)	915 or 975
Bandwidth (nm)	± 15
Insertion Loss (dB)	≤ 0.5 (Typ 0.3)
Operating Signal Wavelength (nm)	1020~1120
Backward Signal Attenuation	≥ 50
Return loss (Input/output) (dB)	$\geq 35/35$
Power handling (W)	10
Fiber Type	Multimode Fiber 105/125 (NA 0.15 or 0.22)
Operating temperature ($^{\circ}\text{C}$)	-5 ~ +65
Storage temperature ($^{\circ}\text{C}$)	-40 ~ +85
Package(mm)	58x10x8

Package Dimensions:

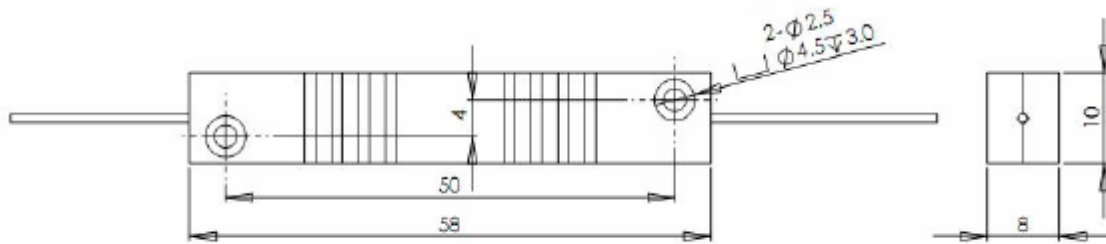

Ordering Information

PLP	Wavelength	Pigtail Type	Fiber Type	Length	Power
	915 975	900=900um loose tube	15=105/125 NA 0.15 22=105/125 NA 0.22	0.8= 0.8m	10=10W