


## Polarization Maintaining Fiber Patchcord

<b>Features</b>	
Low Insertion Loss High Extinction Ratio High stability and reliability	
<b>Application</b>	
Fiber Laser Fiber Amplifier Testing Instrument Optic lab use	

### Specifications

Parameter	Value		
Connector Type	FC/UPC, SC/UPC, LC/UPC, FC/APC, SC/APC, LC/APC		
Wavelength (nm)	1310, 1480, 1550	980, 1064,	850
Insertion Loss (dB)	≤0.3	≤0.5	≤0.7
Return loss (dB)	UPC Type	≥50	
	APC type	≥60	
Extinction Ratio (dB)	≥23	≥23	≥23
Fiber Type	PM1310, PM1550	PM980	PM850
Key Orientation	Slow Axis		
Axis Alignment (deg)	±3		
Operating temperature (°C)	-5~+70		
Storage temperature (°C)	-40 ~ +80		

### Package Dimensions

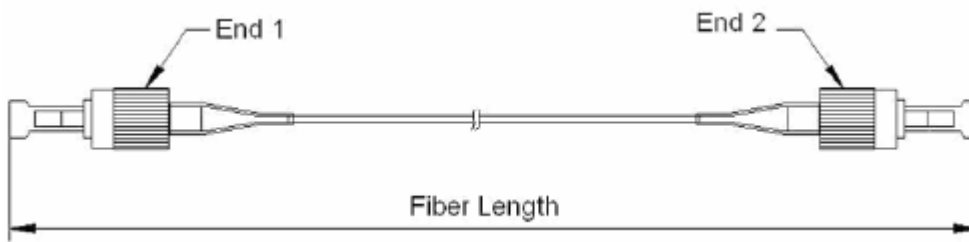

### Ordering Information

PMJP	Connector End1	Connector End 2	Wavelength	Pigtail Type	Fiber Type	Fiber Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC X=Other	850 980 1064 1310 1550	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	PM850 PM980 PM1310 PM1550	1=1m 2=2m X=Other