


## Multimode Fiber Patchcord

<b>Features</b>	
Low Insertion Loss High Return Loss & High Repeatability	
<b>Application</b>	
LAN, Data network CATV Network Telecommunication	

### Specifications:

Parameter	Value	
Connector Type	FC,SC,ST, LC etc	
Operating Wavelength (nm)	850/1310	
Fiber Type	50/125 MM or 62.5/125 MM or 105/125 MM or 200/220 MM	
Insertion loss (dB)	≤0.30	
Return loss (dB)	UPC	≥40
	APC	/
Repeatability (dB)	≤0.1	
Changeability (dB)	≤0.2	
Durability	≥1000	
Operating temperature (°C)	-40 ~ + 85	

### Package

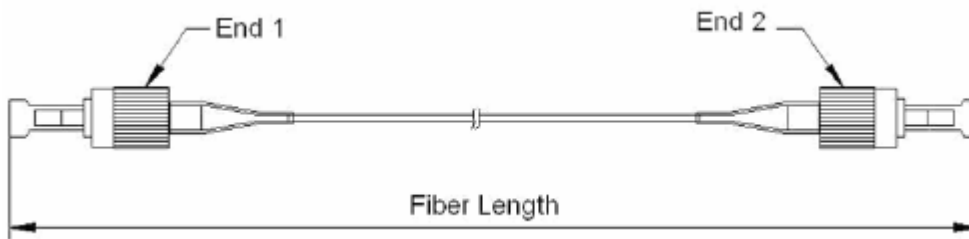

### Ordering Information

JP	Connector (End 1)	Connector (End2)	Wavelength	Pigtail Type	Fiber Type	Length
	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC	850 1310	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	2=50/125 MM 3=62.5/125 MM 7=105/125 NA 0.15 8=105/125 NA 0.22 9=200/220 NA 0.22	1=1m X=Specify