



MPO Patchcord

Features	
4,8,12 and 24 fibre connector termination and assemblies Designed for low loss and standard loss SM or MM application Ruggedized round cable , oval cable, and bare ribbon available	
Application	
Optical Switching Interframe Connection High Fiber density card edge access	

Specifications:

Fiber Type	Single Mode (APC)		Multimode Fiber (PC)	
	Standard	Low Loss	Standard	Low Loss
Insertion Loss(dB)	≤ 0.7	≤ 0.35	≤ 0.7	≤ 0.35
Return Loss (dB)	≥ 60		None	
Durability(Matings)	500			
Operating Temp.	-40 °C to 80 °C			

Package

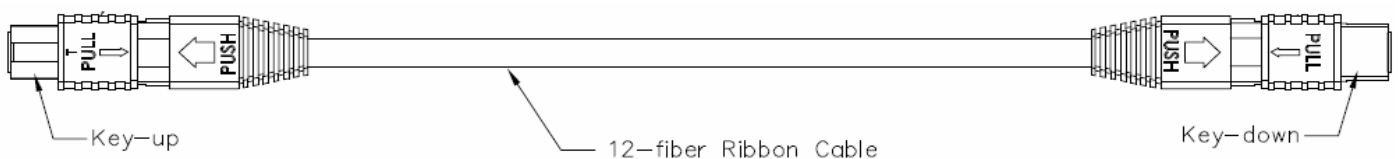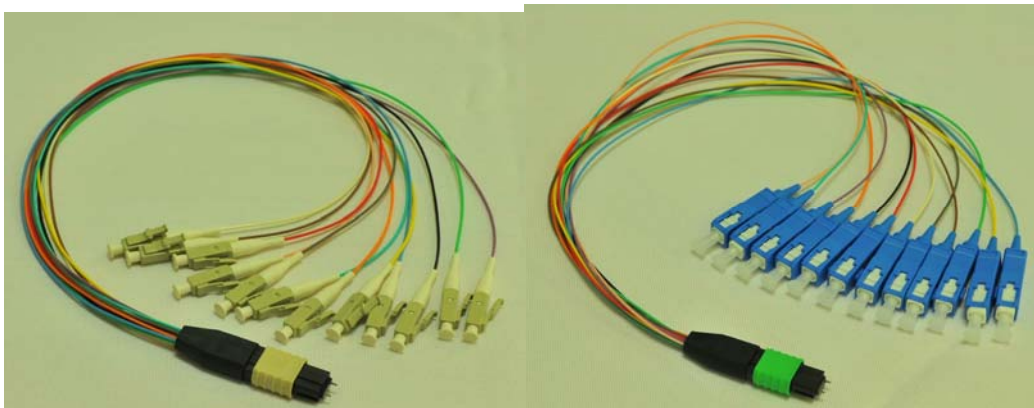

Ordering Information

MPO	Fiber Type	Cable type	Fiber Core	MTP PIN	Connector type	Length
	1=SMF-28e 2=50/125 3=62.5/125 4=50/125 OM3 5=50/125 OM4	1=Ribbon Cable 2=Distribution Cable 3=3.0mm round cable	4=4 Fiber 8=8 Fiber 12=12 Fiber 24=24 Fiber	M=Male F=Female	LC/UPC SC/UPC MPO	1=1m 2=2m X:Specify