

# Optical Fiber Mirror


<b>Features</b>	
<b>Low Insertion Loss</b>	
<b>Compact Size</b>	
<b>Environmental Stability</b>	
<b>Application</b>	
<b>EDFA</b>	
<b>DWDM System</b>	
<b>Fiber Instruments</b>	
<b>Fiber Sensor</b>	

## Specifications:

Parameter	Values
Operating Wavelength (nm)	1310, 1480, 1550
Operating Bandwidth (nm)	±30
Insertion loss (dB)	≤0.5 (Typ. 0.3)
PDL (dB)	≤0.05
PMD (ps)	≤0.05
Power handling (mW)	≤500
Fiber Type	SMF-28e
Operating temperature(°C)	-5 ~ +70
Storage temperature(°C)	-40~ +85
Package dimensions(mm)	Φ4.5x25

Above specification are for devices without connector ,For device with connector ,IL is 0.3dB higher,RL is 5 dB lower.

## Package Dimensions:

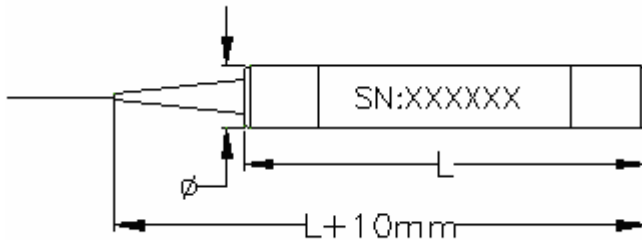

## Ordering Information:

OFM	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Size
	1310 1550	250= 250um bare fiber 900= 900um loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC ST=ST/UPC LC=LC/UPC XX=Other	Φ4.5x25