


Single Mode Pump Laser Protector

Features	
Low Insertion Loss High Power High stability and reliability	
Application	
Fiber Laser	

Specifications

Parameter	Values
Pump laser Wavelength (nm)	915 or 975
Bandwidth (nm)	± 15
Insertion Loss (dB)	≤ 0.8 (Typ 0.5)
Operating Signal Wavelength (nm)	1020~1120
Backward Signal Attenuation	≥ 30
Return loss (Input/output) (dB)	≥ 50
Power handling (W)	1,10
Fiber Type	HI1060
Operating temperature (°C)	-5 ~ +65
Storage temperature (°C)	-40 ~ +85
Package(mm)	Dia 5.5x35

Package Dimensions:

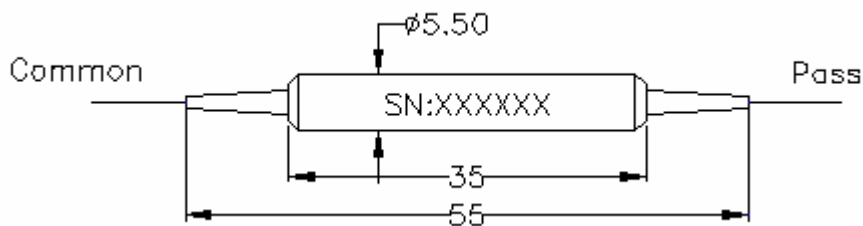

Ordering Information

PLP	Wavelength	Pigtail Type	Fiber Type	Length	Power	Package
	915 975	900=900um loose tube	4=HI1060	0.8= 0.8m	1W	5.5x35