


High Power Coupler+GPON WDM


Specification

Channel		8CH	16CH	32CH
Insertion loss (dB)	IN→Com Port@CATV	≤10.5	≤15	≤18.0
	(1310/1490)→Com Port@IP	≤0.8	≤0.8	≤0.8
	IN→MON (1%)	≤32.00	≤35.0	≤35.0
Polarization dependent loss (dB)		≤0.4		
Operation wavelength (nm)	Common	1260-1620		
	CATV	1540-1560		
	IP	1260-1360,1460-1500		
Isolation (dB)	CATV	≥30		
	IP	≥15		
Return Loss / Directivity (dB)		≥50		
Fiber Type		SMF-28e		
Operating Temperature (°C)		-20~+70		
Storage Temperature (°C)		-40~+85		
Package Dimension		120*80*18		
Connector Type	CATV In	SC, LC (UPC, APC) or no connector		
	MON			
	IP In			
	Common Out			
Fiber jacket		900um loose tube		


Module Optical:

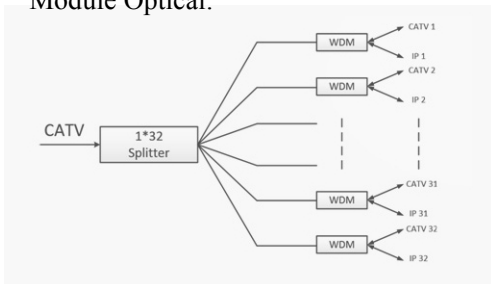


Application

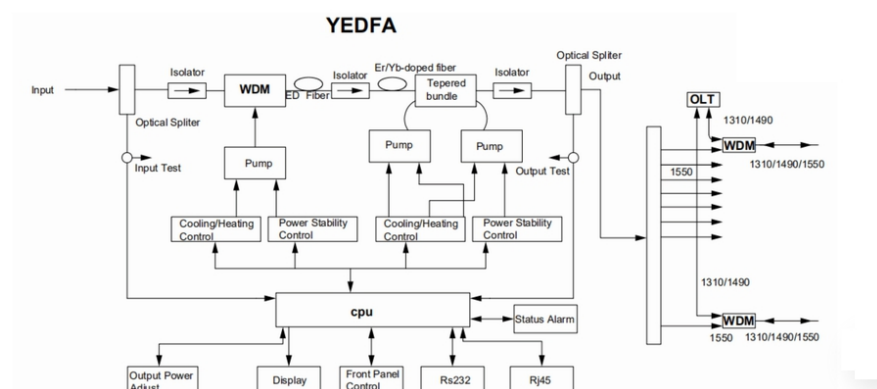

ABS Box

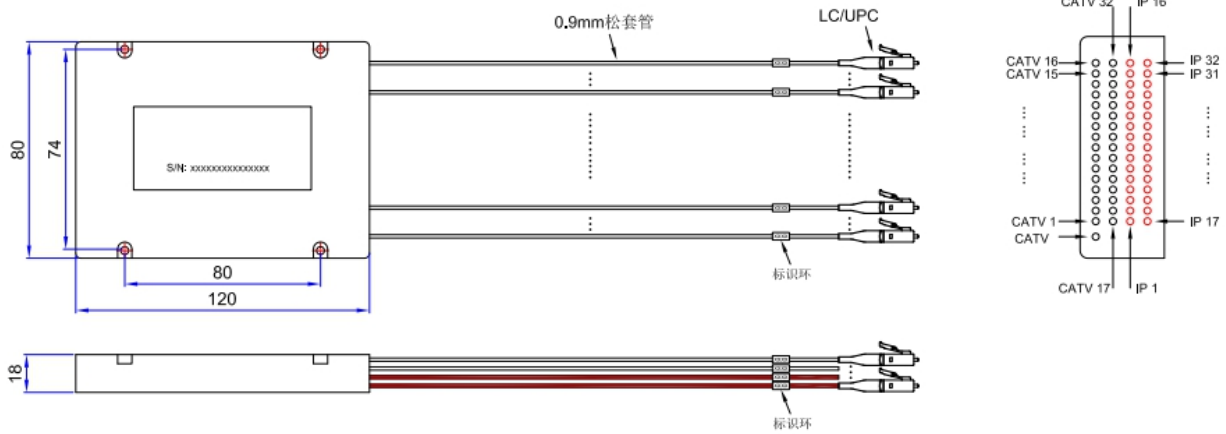

19"1U Rack

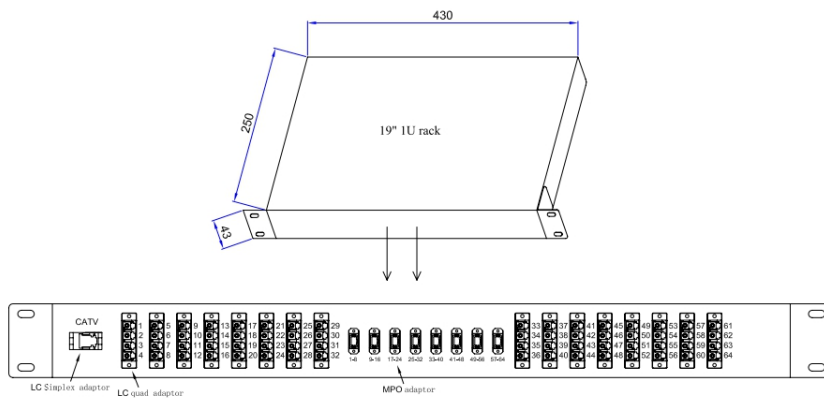

Ordering Information

FWDM M	Port Type	Wavelength	Pigtail Type	Fiber Type	Length	Connector
	08=8ch 16=16ch 32=32ch	534=T1550R1310,149 0	1=900um loose tube	1=SMF-28e	1= 1m X=Specify	NE=None SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other