


High Power Polarization Maintaining Fiber Patchcord

Specifications

Parameter	Value
Connector Type	FC/PC
Wavelength (nm)	1550
Insertion Loss (dB)	≤0.3
Return loss (dB)	≥50
Extinction Ratio (dB)	≥23
Fiber Type	PM1550
Key Orientation	Slow Axis Alignment
Axis Alignment (deg)	±3
Power (W)	15
Operating temperature (°C)	-5~+70
Storage temperature (°C)	-40 ~ +80

Package Dimensions

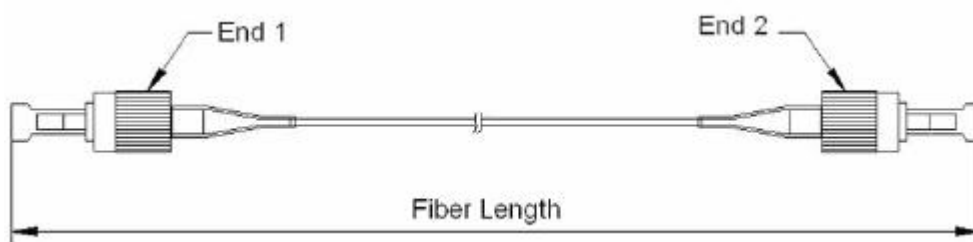

Ordering Information

HPP MJP	Connector End1	Connector End 2	Wavelength	Pigtail Type	Fiber Type	Fiber Length
	NE=None FC=FC/UPC X=Other	NE=None FC=FC/UPC X=other	1550	0=250um bare fiber 1=900um loose tube 2=2mm loose tube 3=3mm loose tube	5=Panda Fiber	1=1m 2=2m X=Other