

980nm Compact Size PM Isolator


Features	
High isolation Low Insertion loss High stability and reliability	
Application	
Fiber Laser sources	

Specifications

Parameter	(HPMIS)
Center wavelength(nm)	980
Bandwidth(nm)	±10
Isolation at λ_c 23℃(dB)	≥25
Insertion Loss at 23℃(dB)	≤1.0
Return loss (Input/output) (dB)	≥50/50
Power handling (W)	0.3-5W
Fiber Type	PM980
Operating temperature (℃)	10 ~ +50
Storage temperature (℃)	-20 ~ +75
Package(mm)	48.5x22x22

* Above specifications are for devices without the connectors.

Package Dimensions

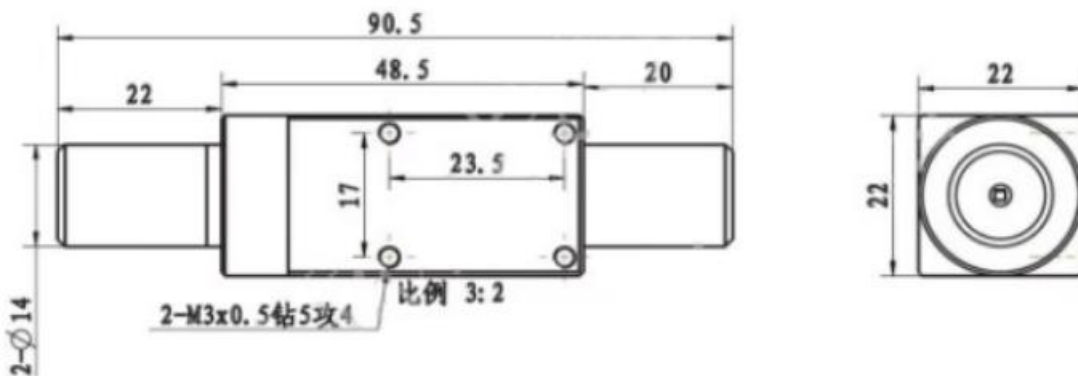

Ordering Information

HPMIS	WL	Pigtail Type	Fiber Type	Length	Connector	Package
	980=980	1=900um loose tube	5=PM980	8=0.8 1= 1m	NE=None FA=FC/APC FC=FC/UPC XX=Other	22=48.5x22x22