


High power Nonreciprocal phase shifter

Operating wavelength (nm)	1030, 1064
Operating Wavelength Range (nm)	± 10
Max. Insertion loss (dB)	1
Rotation Angle (degree)	0
Optical Phase Delay	$\pi/2$
Min. Extinction ratio (dB)	≥ 20
Return loss (dB)	≥ 50
Fiber Type	PM980 Panda Fiber
Max. Power Handling (W)	0.3, 1
Max. Tensile Load(N)	5
Operating temperature $^{\circ}\text{C}$	$-5^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Storage temperature $^{\circ}\text{C}$	$-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Package Dimensions (mm)	68x32x28

Dimension:

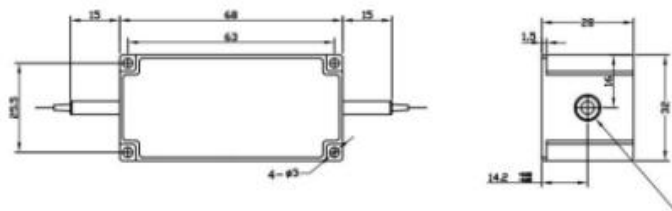

Ordering information

ISPD	Wavelength	Phase Delay	Rotation Angle	Pigtail Type	Fiber Type	Length	Connector
	1064 1030	, $H=\pi/2$	0=0 degree	1=0.9mm loose tube	5=PM fiber	7=0.70 1=1m	NE=None FC=FC/UPC FA=FC/APC XX=Other