


In Line Fixed Optical Attenuator

Features	
High precision Excellent Stability and Reliability	
Application	
Optical communication systems CATV Networks	

Specifications

Parameter	In Line	
Wavelength (nm)	1310 / 1550 ± 50	
Attenuation range (dB)	1dB, 3dB,5 dB, 7dB,10 dB, 15dB, 20dB,25dB,30dB etc.	
Attenuation precision (dB)	±10% Attenuate Value	
Pigtail Type	250um bare fiber	900um/2mm/3mm loose
Package	Φ3×54	Φ3×54
Operating temperature (°C)	-20 ~ 75	
Storage temperature (°C)	-40 ~ 85	

Package Dimensions

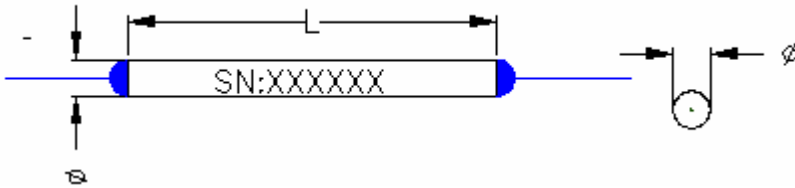

Ordering Information

FOA	Type	Attenuation (dB)	Pigtail Type	Fiber Type	Length	Connector	Package
	I=In Line	1=1 dB 3=3 dB 5=5 dB 10=10 dB 15=15 dB 20=20 dB 30=30 dB XX: Specify	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube 3000=3mm loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC MU=MU/UPC	3x54